


ASTER CC INOX FRZ 1200

Description



Basic information

Family: **ASTER CC INOX FRZ 1200**
Product: **ASTER CC INOX N PC FRZ MW IP66 840 40-72 1200**
Index: **BLS0000014447**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	4008 - 7208
Power of luminaire [W]	22 - 40
Luminaire's light efficiency [lm/W]	180
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP66
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B50
Operating temperature range [°C]	-20 ÷ 35
Driver	MultiWatt driver
Circuit load capacity	B10 - 29 B16 - 46 B20 - 58 C16 - 51
LED driver settings	22W - 4008 lm 28W - 5050 lm 34W - 6128 lm 40W - 7208 lm

Mechanical parameters:

Assembly	ceiling mounted
Material	polycarbonate
Color	grey
Diffuser	PC frosted polycarbonate
Impact resistant	IK10
Dimensions [mm]	1200 x 80 x 72



A graph of light

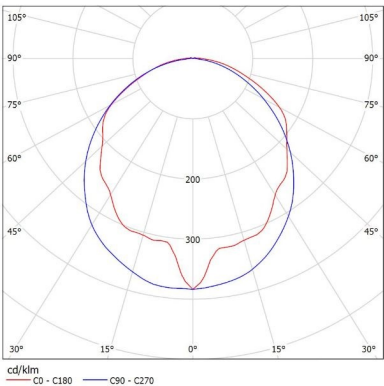

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 17-09-2025