



Description

Basic information

Family: BEE-MAIN WIRELESS  
Product: DAISY PRO P MPRM BM WIRELESS SLAVE WH IP20/44 840 67 596  
Index: BLS0000014408  
Pictograms:




Lighting and electrical parameters


|                                           |                       |
|-------------------------------------------|-----------------------|
| Light source                              | LED                   |
| Luminaire luminous flux [lm]              | 6703                  |
| Power of luminaire [W]                    | 45                    |
| Luminaire's light efficiency [lm/W]       | 149                   |
| Color of the light [K]                    | 4000                  |
| CRI                                       | >80                   |
| SDCM (LED sources)                        | 3                     |
| Photobiological risk class (IEC/EN 62471) | RG0                   |
| Protection against electric shock         | II                    |
| Protection degree                         | IP20/44               |
| Voltage                                   | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h]               | 70000                 |
| Lx/By                                     | L80/B50               |
| Operating temperature range [°C]          | 5 ÷ 30                |
| Driver                                    | MultiWatt driver      |

Mechanical parameters:

|                  |                                   |
|------------------|-----------------------------------|
| Assembly         | recessed into the modular ceiling |
| Material         | aluminum                          |
| Color            | white                             |
| Diffuser         | MPRM microprism                   |
| Impact resistant | IK04                              |
| Dimensions [mm]  | 596 x 596 x 29                    |

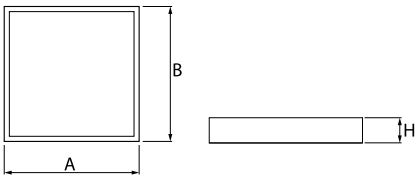

A graph of light

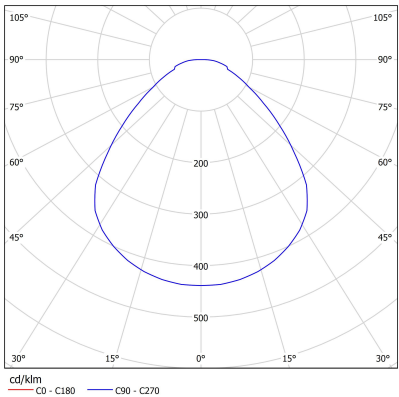

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 01-08-2025