



Description

Basic information

Family: BEE-MAIN CABLE
Product: DAISY PRO P PLX BM CABLE SLAVE WH IP20/44 840 70 596
Index: BLS0000014416
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	7088
Power of luminaire [W]	45
Luminaire's light efficiency [lm/W]	158
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	II
Protection degree	IP20/44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	70000
Lx/By	L80/B50
Operating temperature range [°C]	5 ÷ 30
Driver	MultiWatt driver

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminum
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	596 x 596 x 29

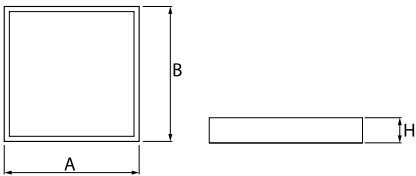

A graph of light

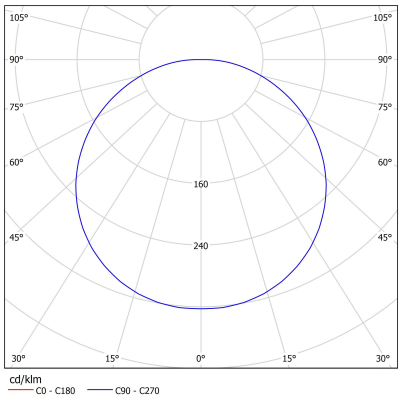

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025