



Description

HOYA luminaire is built from rectangular aluminium profiles that are galvanized. Simple flat shape creates elegantly presenting architectural element. Used LED light sources in this luminaire enables to realize majority of the projects. Application: paths in gardens/parks, entrances to the properties, public spaces.

Basic information

Family: **LIZZY**
Product: **LIZZY L G IP54 ANT 840 10 800x120x120**
Index: **BLS0000015031**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1056
Power of luminaire [W]	7.5
Luminaire's light efficiency [lm/W]	141
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP54
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	- 30 ÷ +30
Driver	LED driver

Mechanical parameters:

Assembly	ground-mounted
Material	aluminum
Color	anthracite
Impact resistant	IK10
Dimensions [mm]	800 x 120 x 120



A graph of light

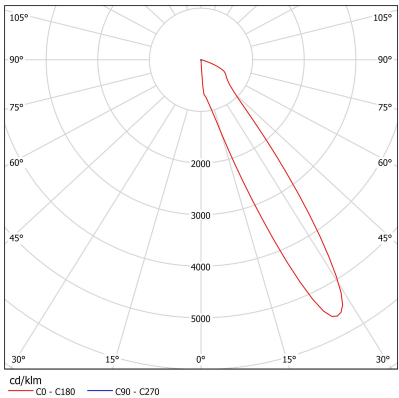

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025