




Description

Downlight LILY O N is made out of lacquered aluminium. LILY O N is perfect for the buildings and spaces with higher standards, such as hotels, banks, offices and public administration buildings.

Basic information

Family:	LILY O N
Product:	LILY O N PC-T IP44 BL 830 25 D195x195
Index:	BLS0000015383
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	2504
Power of luminaire [W]	18.5
Luminaire's light efficiency [lm/W]	135
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	2
Protection against electric shock	II
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted
Material	aluminum
Color	black
Diffuser	PC-T transparent polycarbonate
Impact resistant	IK09
Dimensions [mm]	Ø195 x 195



A graph of light

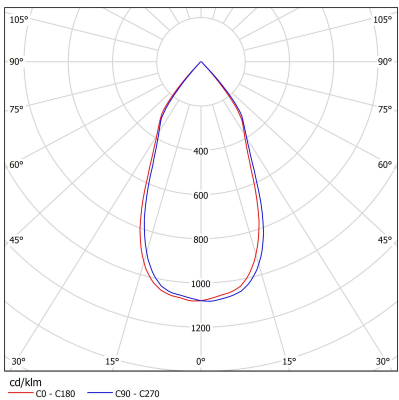

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-10-2025