


Description

Basic information

Family: **FREESIA ARO N**  
Product: **FREESIA ARO N-ML PLX WH 830 23 320x320**  
Index: **BLS0000015459**  
Pictograms:




Lighting and electrical parameters


Light source	LED
<b>Luminaire luminous flux [lm]</b>	<b>2388</b>
Power of luminaire [W]	19
<b>Luminaire's light efficiency [lm/W]</b>	<b>126</b>
Color of the light [K]	3000
<b>CRI</b>	<b>&gt;80</b>
SDCM (LED sources)	3
<b>Protection against electric shock</b>	<b>I</b>
Protection degree	IP40
<b>Voltage</b>	<b>220-240V, 50-60Hz</b>
Lifetime of LED sources [h]	100000
<b>Lx/By</b>	<b>L80/B10</b>
Operating temperature range [°C]	5 ÷ 30
<b>Driver</b>	<b>LED driver</b>

Mechanical parameters:

Assembly	ceiling mounted with magnets
<b>Material</b>	<b>aluminum</b>
Color	white
<b>Diffuser</b>	<b>PLX opalized</b>
Impact resistant	IK04
<b>Dimensions [mm]</b>	<b>320 x 320 x 65</b>



A graph of light

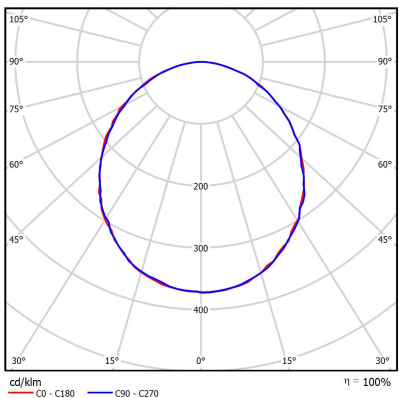

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 18-08-2025