



Description

Basic information

Family: **DAISY RASTER**
Product: **DAISY RASTER P WH EU MW 840 19-62 596**
Index: **BLS0000015722**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1927 – 6297
Power of luminaire [W]	10,8 – 38,9
Luminaire's light efficiency [lm/W]	178–161
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	II
Protection degree	IP20/40
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver
LED driver settings	10,8W – 1927lm / 14,5W – 2544lm 18,1W – 3148lm / 21,6W – 3740lm 23,5W – 4031lm / 25,3W – 4320lm 27,0W – 4605lm / 30,8W – 5167lm 32,7W – 5444lm / 34,6W – 5718lm 36,5W – 5989lm / 38,9W – 6297lm

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminum
Color	white
Impact resistant	IK04
Dimensions [mm]	595 x 595 x 15

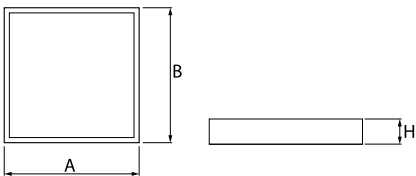

A graph of light

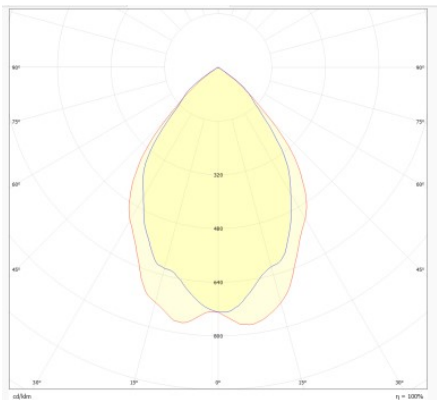

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025