



Description

The LILY recessed luminaire has a cast housing, with a PLX diffuser that disperses light, resulting in a high degree of lighting uniformity and soft, gentle light in the room. LILY luminaires can be used both in offices, ancillary rooms and to light up communications, entrance halls and toilets.

Basic information

Family:	LILY O P G2
Product:	LILY O P G2 PLX EU WH IP20/54 840 11 D110
Index:	BLS0000015955
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	1190
Power of luminaire [W]	9.7
Luminaire's light efficiency [lm/W]	123
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	II
Protection degree	IP20/54
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	aluminum
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	Ø110 x 55
Mounting hole [mm]	Ø 95

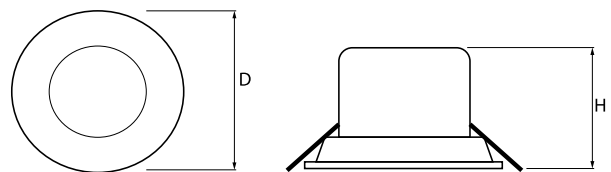

A graph of light

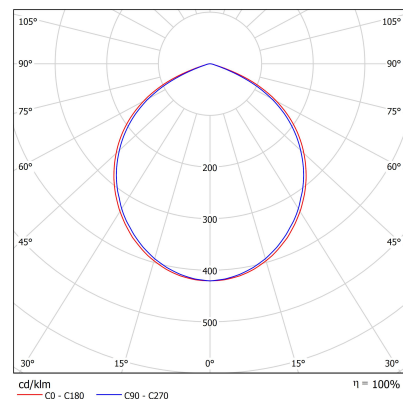

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025