



Description

The LILY recessed luminaire has a cast housing, with a PLX diffuser that disperses light, resulting in a high degree of lighting uniformity and soft, gentle light in the room. LILY luminaires can be used both in offices, ancillary rooms and to light up communications, entrance halls and toilets.

Basic information

Family: LILY O P G2  
Product: LILY O P G2 PLX EU WH IP20/54 830 11 D110  
Index: BLS0000015956  
Pictograms:




Lighting and electrical parameters


|                                     |                   |
|-------------------------------------|-------------------|
| Light source                        | LED               |
| Luminaire luminous flux [lm]        | 1130              |
| Power of luminaire [W]              | 9.7               |
| Luminaire's light efficiency [lm/W] | 116               |
| Color of the light [K]              | 3000              |
| CRI                                 | >80               |
| SDCM (LED sources)                  | 3                 |
| Protection against electric shock   | II                |
| Protection degree                   | IP20/54           |
| Voltage                             | 220-240V, 50-60Hz |
| Lifetime of LED sources [h]         | 100000            |
| Lx/By                               | L70/B50           |
| Operating temperature range [°C]    | 5 ÷ 30            |
| Driver                              | LED driver        |

Mechanical parameters:

|                    |  |
|--------------------|--|
| Assembly           | recessed into the modular and plasterboard ceiling |
| Material           | aluminum   |
| Color              | white  |
| Diffuser           | PLX opalized                                       |
| Impact resistant   | IK04   |
| Dimensions [mm]    | Ø110 x 55  |
| Mounting hole [mm] | Ø 95   |

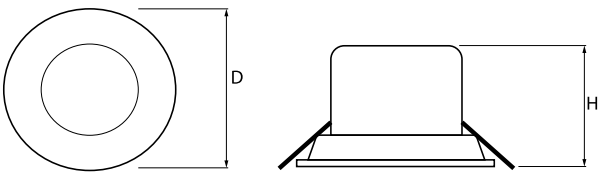

A graph of light

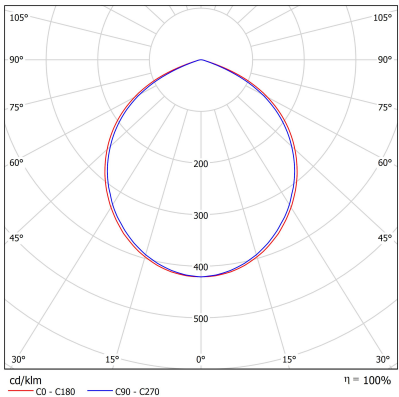

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 18-08-2025