



## Description

LILY OD N outdoor luminaire – it is intended for ceiling mounting on the outside of the building. Aluminium body, transparent glass, or transparent glass with additional milky diffuser. Intension – lighting entrances to buildings, arcades, terraces, balconies.

## Basic information

Family:	<b>LILY OD O N</b>
Product:	<b>LILY OD O N SH+PLX BL IP65 840 22 D120</b>
Index:	<b>BLS0000016002</b>
Pictograms:	




## Lighting and electrical parameters


Light source	LED
<b>Luminaire luminous flux [lm]</b>	<b>2250</b>
Power of luminaire [W]	19
<b>Luminaire's light efficiency [lm/W]</b>	<b>118</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;80</b>
SDCM (LED sources)	2
<b>Protection against electric shock</b>	<b>I</b>
Protection degree	IP65
<b>Voltage</b>	<b>220-240V, 50-60Hz</b>
Lifetime of LED sources [h]	100000
<b>Lx/By</b>	<b>L80/B10</b>
Operating temperature range [°C]	-25 ÷ 30
<b>Driver</b>	<b>LED driver</b>

## Mechanical parameters:

Assembly	ceiling mounted
<b>Material</b>	<b>aluminum</b>
Color	black
<b>Diffuser</b>	<b>ST transparent glass + PLX</b>
Impact resistant	IK10
<b>Dimensions [mm]</b>	<b>D120 x 168</b>



## A graph of light

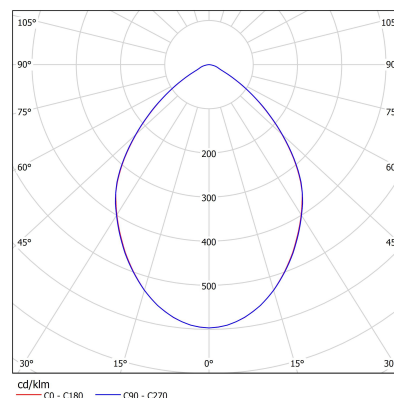

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025