Product card



HOYA LC

Description

HOYA luminary is built from rectangular aluminium profiles that are galvanized. Simple flat shape creates elegantly presenting architectural element. Used LED light sources in this luminary enables to realize majority of the projects. Application: paths in gardens/parks, entrances to the properties, public spaces.

Basic information

Family:	**HOYA LC**
Product:	**HOYA LC G IP65 ANT 740 ST 50 2500x150x150**
Index:	**BLS0000016249**
Pictograms:	

Lighting and electrical parameters

Light source	LED
Luminaire luminous flux [lm]	**5003**
Power of luminaire [W]	29.7
Luminaire's light efficiency [lm/W]	**168**
Color of the light [K]	4000
CRI	**>70**
SDCM (LED sources)	3
Protection against electric shock	**I**
Protection degree	IP65
Voltage	**220-240V, 50-60Hz**
Lifetime of LED sources [h]	102000
Lx/By	**L90/B10**
Operating temperature range [°C]	-40 ÷ 50
Driver	**LED driver**

Mechanical parameters:

Assembly	ground-mounted
Material	**aluminum**
Color	anthracite
Diffuser	**transparent glass lenses**
Impact resistant	IK09
Dimensions [mm]	**2500 x 150 x 150**



A graph of light

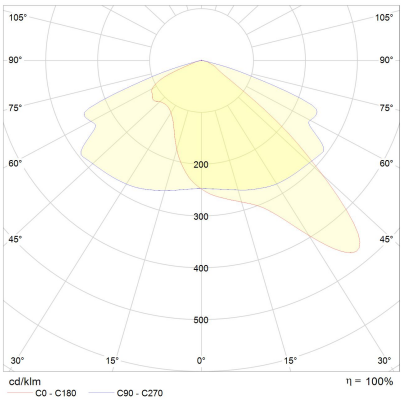

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025

Accessories

Index	BLS0000005917
Name	Fundament B50

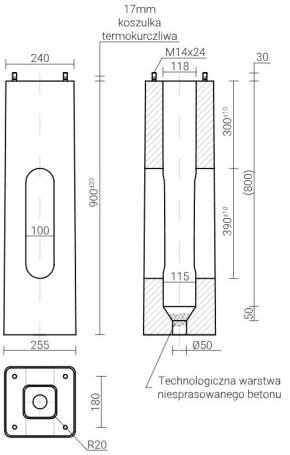

Index	BLS0000016280
Name	HOYA G 150x150 - Cover ANT

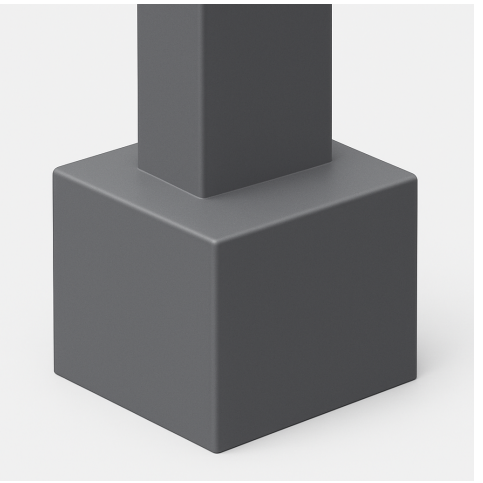

Index	BLS0000009053
Name	Komplet nakrętek montażowych słupa + kapturek maskujący czarnym - do B-50
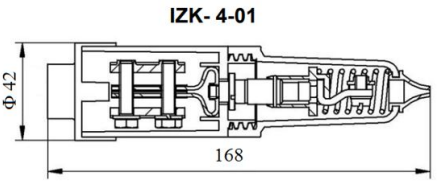
Index	BLS0000009083
Name	Izolacyjne złącze bezpiecznikowe IZK-4-01