



## Description

The LILY recessed luminaire has a cast housing, with a PLX diffuser that disperses light, resulting in a high degree of lighting uniformity and soft, gentle light in the room. LILY luminaires can be used both in offices, ancillary rooms and to light up communications, entrance halls and toilets.

## Basic information

Family:	<b>LILY O P G2</b>
Product:	<b>LILY O P G2 PLX EU WH IP20/54 840 9 D110</b>
Index:	<b>BLS0000016364</b>
Pictograms:	




## Lighting and electrical parameters


Light source	LED
<b>Luminaire luminous flux [lm]</b>	<b>964</b>
Power of luminaire [W]	7.9
<b>Luminaire's light efficiency [lm/W]</b>	<b>122</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;80</b>
SDCM (LED sources)	3
<b>Protection against electric shock</b>	<b>II</b>
Protection degree	IP20/54
<b>Voltage</b>	<b>220-240V, 50-60Hz</b>
Lifetime of LED sources [h]	100000
<b>Lx/By</b>	<b>L70/B50</b>
Operating temperature range [°C]	5 ÷ 30
<b>Driver</b>	<b>LED driver</b>

## Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
<b>Material</b>	<b>aluminum</b>
Color	white
<b>Diffuser</b>	<b>PLX opalized</b>
Impact resistant	IK04
<b>Dimensions [mm]</b>	<b>Ø110 x 55</b>
Mounting hole [mm]	Ø 95

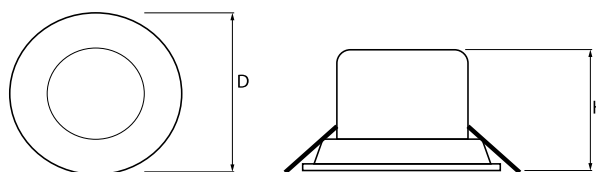

## A graph of light

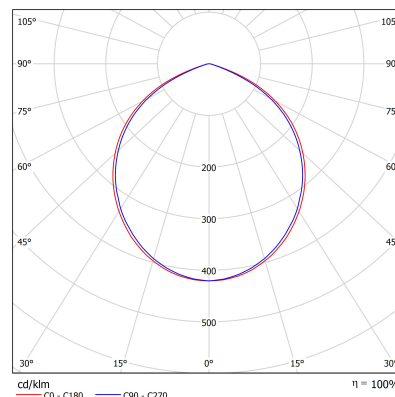

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025