

ASTER INOX FRZ 1200




Description

Industrial luminaires ASTER is a ceiling luminaire with highly-efficient LED light sources. It features high ingress protection (IP66) and high protection against mechanical impact (IK10). ASTER luminaire is well-adjusted to dusty rooms or those with elevated humidity. . ASTER luminaires are intended for rooms, such as halls, magazines, warehouses, subways, underground parking lots etc. ASTER should be exploited in temperature between -25°C and +30°C.

Basic information

Family:	ASTER INOX FRZ 1200
Product:	ASTER INOX N PC FRZ IP66 840 70 1200
Index:	BLS0000016386
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	7020
Power of luminaire [W]	43.8
Luminaire's light efficiency [lm/W]	160
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP66
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B50
Operating temperature range [°C]	-20 ÷ 40
Driver	LED driver

Mechanical parameters:

Assembly	ceiling mounted
Material	polycarbonate
Color	gray
Diffuser	PC frosted polycarbonate
Impact resistant	IK10
Dimensions [mm]	1200 x 100 x 77



A graph of light

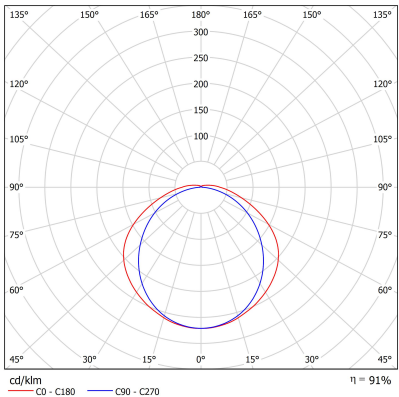

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025