

## Description

The LILY recessed luminaire has a cast housing, with a PMMA diffuser made as a Fresnel lens shaping the photometric body, resulting in a very low UGR glare in the room. The chrome silver ring gives the fixture a very interesting elegant look, creating a more architectural look. LILY luminaires can be used both in offices, ancillary rooms and to light up communications, entrance halls and toilets.

## Basic information

Family: **LILY O P G2**  
 Product: **LILY O P G2 EU CHROME SILVER IP20/54 840 8 D110**  
 Index: **BLS0000016449**  
 Pictograms:




## Lighting and electrical parameters


|                                            |                          |
|--------------------------------------------|--------------------------|
| Light source                               | LED                      |
| <b>Luminaire luminous flux [lm]</b>        | <b>885</b>               |
| Power of luminaire [W]                     | 5.9                      |
| <b>Luminaire's light efficiency [lm/W]</b> | <b>150</b>               |
| Color of the light [K]                     | 4000                     |
| <b>CRI</b>                                 | <b>&gt;80</b>            |
| SDCM (LED sources)                         | 3                        |
| <b>Protection against electric shock</b>   | <b>II</b>                |
| Protection degree                          | IP20/54                  |
| <b>Voltage</b>                             | <b>220-240V, 50-60Hz</b> |
| Lifetime of LED sources [h]                | 100000                   |
| <b>Lx/By</b>                               | <b>L70/B50</b>           |
| Operating temperature range [°C]           | 5 ÷ 30                   |
| <b>Driver</b>                              | <b>LED driver</b>        |

## Mechanical parameters:

|                        |                                                    |
|------------------------|----------------------------------------------------|
| Assembly               | recessed into the modular and plasterboard ceiling |
| <b>Material</b>        | <b>aluminum</b>                                    |
| Impact resistant       | IK04                                               |
| <b>Dimensions [mm]</b> | <b>Ø110 x 55</b>                                   |
| Mounting hole [mm]     | Ø 95                                               |

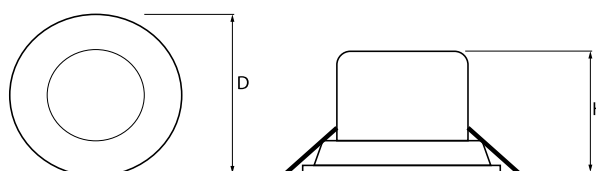

## A graph of light

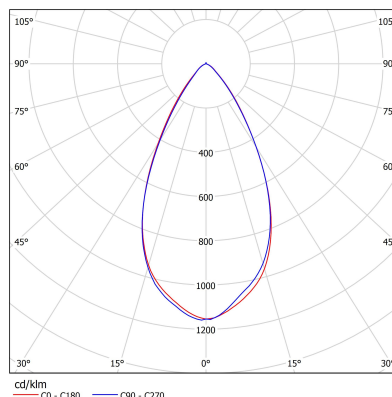

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025