



## Description

The LILY recessed luminaire has a cast housing, with a PLX diffuser that disperses light, resulting in a high degree of lighting uniformity and soft, gentle light in the room. The chrome silver ring gives the fixture a very interesting elegant look, creating a more architectural look. LILY luminaires can be used both in offices, ancillary rooms and to light up communications, entrance halls and toilets.

## Basic information

Family:	<b>LILY O P G2</b>
Product:	<b>LILY O P G2 PLX EU CHROME SILVER IP20/54 830 9 D110</b>
Index:	<b>BLS0000016455</b>
Pictograms:	




## Lighting and electrical parameters


Light source	LED
<b>Luminaire luminous flux [lm]</b>	<b>925</b>
Power of luminaire [W]	7.9
<b>Luminaire's light efficiency [lm/W]</b>	<b>117</b>
Color of the light [K]	3000
<b>CRI</b>	<b>&gt;80</b>
SDCM (LED sources)	3
<b>Protection against electric shock</b>	<b>II</b>
Protection degree	IP20/54
<b>Voltage</b>	<b>220-240V, 50-60Hz</b>
Lifetime of LED sources [h]	100000
<b>Lx/By</b>	<b>L70/B50</b>
Operating temperature range [°C]	5 ÷ 30
<b>Driver</b>	<b>LED driver</b>

## Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
<b>Material</b>	<b>aluminum</b>
Diffuser	PLX opalized
<b>Impact resistant</b>	<b>IK04</b>
Dimensions [mm]	Ø110 x 55
<b>Mounting hole [mm]</b>	<b>Ø95</b>

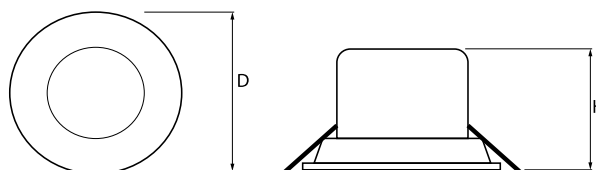

## A graph of light

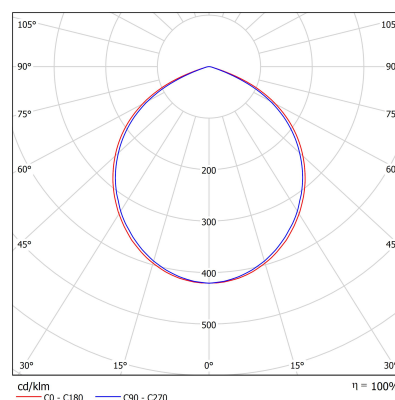

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025