



Description

The LILY recessed luminaire has a cast housing, with a PLX diffuser that disperses light, resulting in a high degree of lighting uniformity and soft, gentle light in the room. The chrome silver ring gives the fixture a very interesting elegant look, creating a more architectural look. LILY luminaires can be used both in offices, ancillary rooms and to light up communications, entrance halls and toilets.

Basic information

Family:	LILY O P G2
Product:	LILY O P G2 PLX EU CHROME SILVER IP20/54 830 6 D110
Index:	BLS0000016456
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	697
Power of luminaire [W]	5.9
Luminaire's light efficiency [lm/W]	118
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	II
Protection degree	IP20/54
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	LED driver

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	aluminum
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	Ø110 x 55
Mounting hole [mm]	Ø95

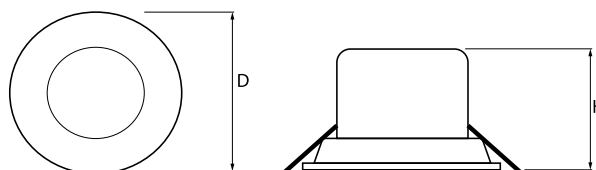

A graph of light

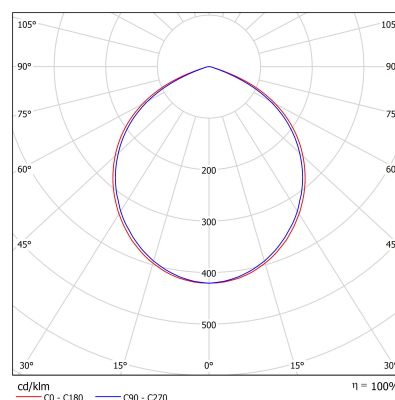

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025