



Description

The LILY recessed luminaire has a cast housing, with a PMMA diffuser made as a Fresnel lens shaping the photometric body, resulting in a very low UGR glare in the room. The matt gold ring gives the fitting a very elegant character, definitely enhancing its decorative value. During installation, it is possible to choose from 3 colour temperatures - warm (830 - 3000K), standard (840-4000K), or cold (857-5700K), and the MultiWatt power supply used allows different light outputs to be set. LILY luminaires can be used both in offices, ancillary rooms and to light up communications, entrance halls and toilets.

Basic information

Family: **LILY O P G2**
 Product: **LILY O P G2 EU MW MATT GOLD IP20/54 830/840/857 24-36 D165**
 Index: **BLS0000016400**
 Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	2437 - 3648
Power of luminaire [W]	18,6 - 26,1
Luminaire's light efficiency [lm/W]	131 - 140
Color of the light [K]	3000 - 4000 - 5700
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	II
Protection degree	IP20/54
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	MultiWatt driver
LED driver settings	840: 3520 lm - 26,1W / 3048 lm - 22,2W 840: 2798 lm - 20,3W / 2566 lm - 18,6W 830: 3344 lm - 26,1W / 2896 lm - 22,2W 830: 2658 lm - 20,3W / 2437 lm - 18,6W 857: 3648 lm - 26,1W / 3201 lm - 22,2W 857: 2938 lm - 20,3W / 2694 lm - 18,6W

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	aluminum
Impact resistant	IK04
Dimensions [mm]	Ø165 x 60
Mounting hole [mm]	Ø145

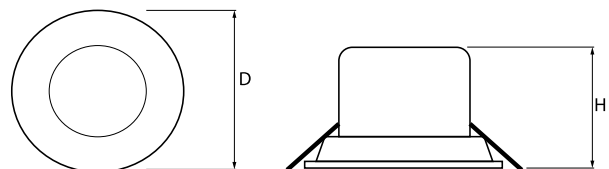

A graph of light

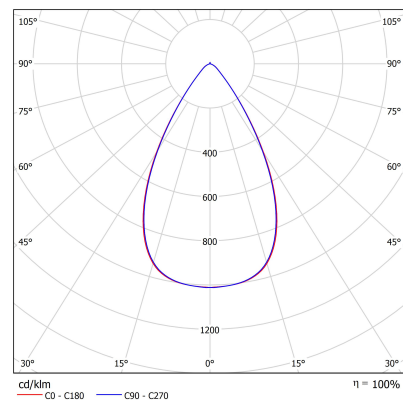

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 17-09-2025