



Description

The LILY recessed luminaire has a cast housing, with a PLX diffuser that disperses light, resulting in a high degree of lighting uniformity and soft, gentle light in the room. The matt gold ring gives the fitting a very elegant character, definitely enhancing its decorative value. During installation, it is possible to choose from 3 colour temperatures - warm (830 - 3000K), standard (840-4000K), or cold (857-5700K), and the MultiWatt power supply used allows different light outputs to be set. LILY luminaires can be used both in offices, ancillary rooms and to light up communications, entrance halls and toilets.

Basic information

Family: LILY O P G2
Product: LILY O P G2 PLX EU MW MATT GOLD IP20/54 830/840/857 6-20 D165
Index: BLS0000016407
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	643 - 2071
Power of luminaire [W]	5,5 - 16,7
Luminaire's light efficiency [lm/W]	117 - 124
Color of the light [K]	3000 - 4000 - 5700
CRI	>80
SDCM (LED sources)	3
Protection against electric shock	II
Protection degree	IP20/54
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	100000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	MultiWatt driver
LED driver settings	840: 1973 lm - 16,7 W / 1549 lm - 13,0 W 840: 1118 lm - 9,3 W / 677 lm - 5,5 W 830: 1874 lm - 16,7 W / 1472 lm - 13,0 W 830: 1062 lm - 9,3 W / 643 lm - 5,5 W 857: 2071 lm - 16,7 W / 1627 lm - 13,0 W 857: 1174 lm - 9,3 W / 711 lm - 5,5 W

Mechanical parameters:

Assembly	recessed into the modular and plasterboard ceiling
Material	aluminum
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	Ø165 x 60
Mounting hole [mm]	Ø145

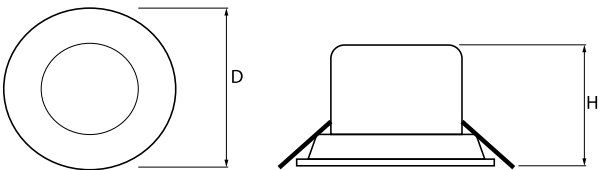

A graph of light

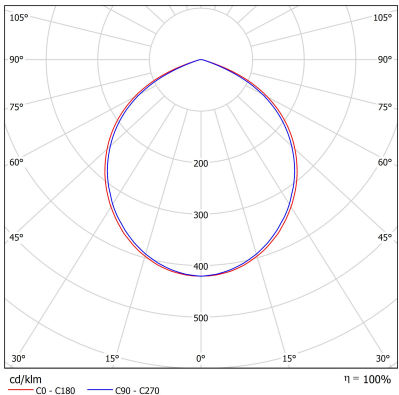

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025