

## Description

Surface-mounted luminaire ORCHID SLIM is made out of anodized aluminium profile. ORCHID SLIM luminaire is recommended for: office spaces, schools, universities, conference halls or public administration buildings etc.

## Basic information

Family: **ORCHID SLIM35**  
 Product: **ORCHID SLIM35 Z MPRM WH 840 ZAW-1,5m 62 1135**  
 Index: **BLS0000016533**  
 Pictograms:




## Lighting and electrical parameters

Light source	LED
<b>Luminaire luminous flux [lm]</b>	<b>6202</b>
Power of luminaire [W]	47.9
<b>Luminaire's light efficiency [lm/W]</b>	<b>129</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;80</b>
SDCM (LED sources)	3
<b>Photobiological risk class (IEC/EN 62471)</b>	<b>RG0</b>
Protection against electric shock	I
<b>Protection degree</b>	<b>IP44</b>
Voltage	220-240V, 50-60Hz
<b>Lifetime of LED sources [h]</b>	<b>90000</b>
Lx/By	L70/B10
<b>Operating temperature range [°C]</b>	<b>5 ÷ 30</b>
Driver	DALI driver

## Mechanical parameters:

Assembly	pendant
<b>Material</b>	<b>aluminum</b>
Color	white
<b>Diffuser</b>	<b>PLX opalized</b>
Impact resistant	IK04
<b>Dimensions [mm]</b>	<b>1135 x 35 x 65</b>

## A graph of light

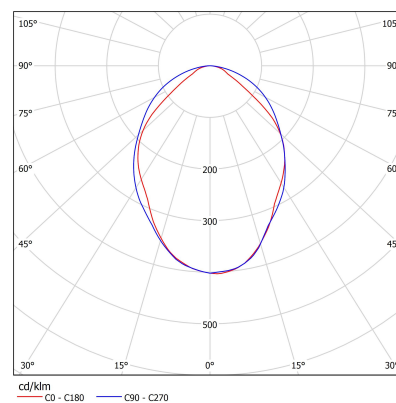

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025