


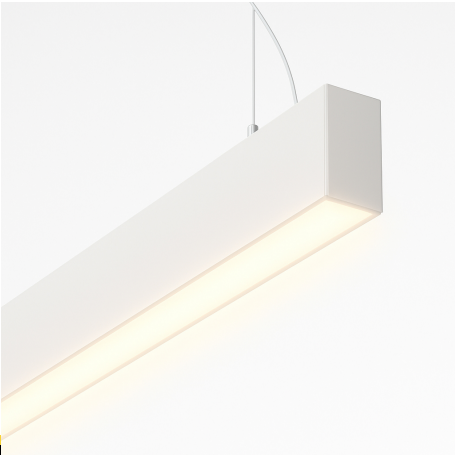

ORCHID SLIM35

Description

Surface-mounted luminary ORCHID SLIM is made out of anodized aluminium profile. ORCHID SLIM luminaire is recommended for: office spaces, schools, universities, conference halls or public administration buildings etc.

Basic information

Family:	ORCHID SLIM35
Product:	ORCHID SLIM35 Z UD PLX/MPRM WH 840 ZAW-1,5m 26/50 1135
Index:	BLS0000016538
Pictograms:	




Lighting and electrical parameters

Light source	LED
Luminaire luminous flux [lm]	UP - 2618 / DOWN - 5019
Power of luminaire [W]	63.3
Luminaire's light efficiency [lm/W]	121
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP40
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	90000
Lx/By	L70/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DALI driver

Mechanical parameters:

Assembly	pendant
Material	aluminum
Color	white
Diffuser	PLX opalized
Impact resistant	IK04
Dimensions [mm]	1135 x 35 x 65

A graph of light

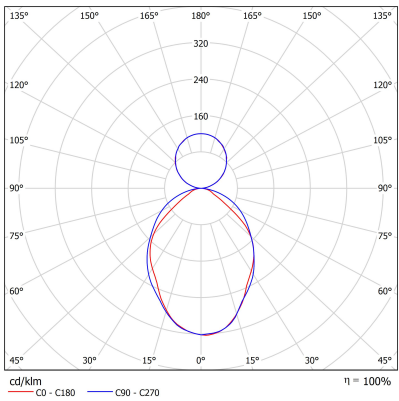

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-10-2025