



## Description

## Basic information

Family: **TULIP L D65**  
 Product: **TULIP L 38st 3F WH 940 12 D65**  
 Index: **BLS0000016607**  
 Pictograms:




## Lighting and electrical parameters


Light source	LED
<b>Luminaire luminous flux [lm]</b>	<b>1285</b>
Power of luminaire [W]	11.4
<b>Luminaire's light efficiency [lm/W]</b>	<b>113</b>
Color of the light [K]	4000
<b>CRI</b>	<b>&gt;90</b>
SDCM (LED sources)	3
<b>Beam angle [°]</b>	<b>38 st</b>
Protection against electric shock	I
<b>Protection degree</b>	<b>IP20</b>
Voltage	220-240 V, 50-60 Hz
<b>Lifetime of LED sources [h]</b>	<b>70000</b>
Lx/By	L80/B10
<b>Operating temperature range [°C]</b>	<b>5 ÷ 30</b>
Driver	LED driver

## Mechanical parameters:

Assembly	for 3-circuit track
<b>Material</b>	<b>aluminum</b>
Color	white
<b>Impact resistant</b>	<b>IK04</b>
Dimensions [mm]	D65 x 170

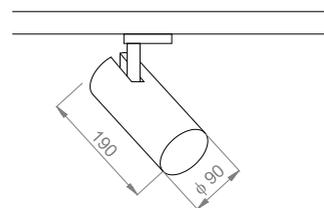

## A graph of light

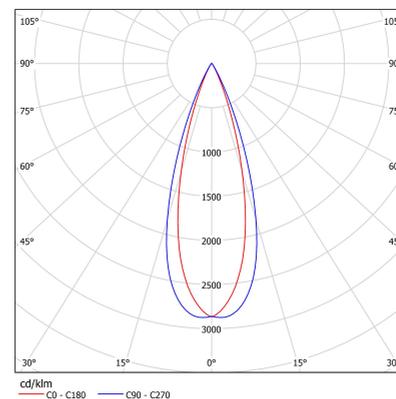

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 17-09-2025