



# ORCHID SLIM35

## Description

Surface-mounted luminary ORCHID SLIM is made out of anodized aluminium profile. ORCHID SLIM luminary is recommended for: office spaces, schools, universities, conference halls or public administration buildings etc.

## Basic information

|             |                                              |
|-------------|----------------------------------------------|
| Family:     | ORCHID SLIM35                                |
| Product:    | ORCHID SLIM35 Z MPRM BL 840 ZAW-1,5m 62 1135 |
| Index:      | BLS0000016797                                |
| Pictograms: |                                              |




## Lighting and electrical parameters

|                                           |                   |
|-------------------------------------------|-------------------|
| Light source                              | LED               |
| Luminaire luminous flux [lm]              | 6202              |
| Power of luminaire [W]                    | 47.9              |
| Luminaire's light efficiency [lm/W]       | 129               |
| Color of the light [K]                    | 4000              |
| CRI                                       | >80               |
| SDCM (LED sources)                        | 3                 |
| Photobiological risk class (IEC/EN 62471) | RG0               |
| Protection against electric shock         | I                 |
| Protection degree                         | IP44              |
| Voltage                                   | 220-240V, 50-60Hz |
| Lifetime of LED sources [h]               | 90000             |
| Lx/By                                     | L70/B10           |
| Operating temperature range [°C]          | 5 ÷ 30            |
| Driver                                    | DALI driver       |

## Mechanical parameters:

|                  |                |
|------------------|----------------|
| Assembly         | pendant        |
| Material         | aluminum       |
| Color            | black          |
| Diffuser         | PLX opalized   |
| Impact resistant | IK04           |
| Dimensions [mm]  | 1135 x 35 x 65 |

## A graph of light

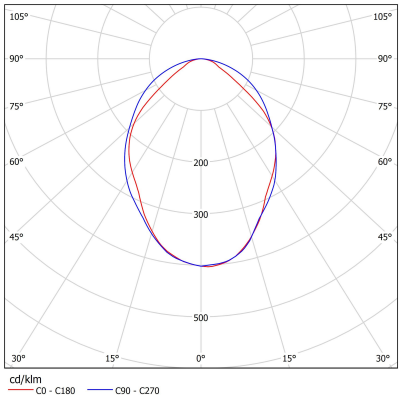

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 18-08-2025