

Description

Surface-mounted luminaire ORCHID SLIM is made out of anodized aluminium profile. ORCHID SLIM luminaire is recommended for: office spaces, schools, universities, conference halls or public administration buildings etc.

Basic information

Family: **ORCHID SLIM35**
 Product: **ORCHID SLIM35 Z RASTER BL/BL 840 ZAW-1,5m 42 1085**
 Index: **BLS0000016805**
 Pictograms:




Lighting and electrical parameters

| | |
|--|-------------------|
| Light source | LED |
| Luminaire luminous flux [lm] | 4243 |
| Power of luminaire [W] | 31.4 |
| Luminaire's light efficiency [lm/W] | 135 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | I |
| Protection degree | IP40 |
| Voltage | 220-240V, 50-60Hz |
| Lifetime of LED sources [h] | 90000 |
| Lx/By | L70/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | DALI driver |

Mechanical parameters:

| | |
|-------------------------|-----------------|
| Assembly | pendant |
| Material | aluminum |
| Color | black |
| Impact resistant | IK04 |
| Dimensions [mm] | 1085 x 35 x 65 |

A graph of light

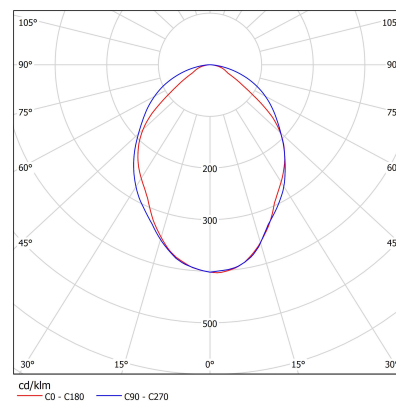

Technical data may be changed. Photos of the luminaires may differ from reality.

Date of last update: 18-08-2025