



Description

ROSE PRO P luminaire is a slender luminaire designed for spaces with increased requirements on cleanliness, installed in a modular clip-in ceiling. The latest generation of LEDs with light efficiency >190 lm/W guarantees the most energy-efficient solution available on the market. LED sources' lifespan enables 35 years of work assuming 8 hours a day! Microprismatic diaphragm forms a photometric lump with low UGR.

Basic information

Family:	ROSE P CLIP-IN
Product:	ROSE P CLIP-IN MPRM SH DALI IP65 940 97 1200x600
Index:	BLS0000006072
Pictograms:	




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	14406
LED power [W]	93.6
Luminaire luminous flux [lm]	11088
Power of luminaire [W]	99
Luminaire's light efficiency [lm/W]	112
Color of the light [K]	4000
CRI	>90
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP65
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L70/B50
Operating temperature range [°C]	5 ÷ 30
Driver	DALI Driver

Mechanical parameters:

Assembly	recessed into clip-in ceiling
Material	steel sheet
Color	white
Diffuser	MPRM SH microprism tempered glass
Impact resistant	IK08
Dimensions [mm]	1195 x 595 x 80



A graph of light

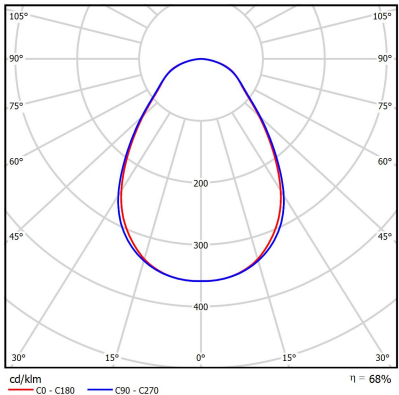

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 25-04-2024