



Description

Basic information

Family: ORCHID PRO P  
Product: ORCHID PRO P PLX BL 830 30 1195  
Index: BLS0000007243  
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminous flux LED [lm]	4166
LED power [W]	21.8
Luminaire luminous flux [lm]	3081
Power of luminaire [W]	23.8
Luminaire's light efficiency [lm/W]	129
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP44
Voltage	220-240 V, 50-60 Hz
Lifetime of LED sources [h]	150000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	LED Driver

Mechanical parameters:

Assembly	recessed into the modular ceiling
Material	aluminium
Color	black
Diffuser	PLX opalized
Impact resistant	IK06
Dimensions [mm]	1195 x 80 x 72



A graph of light

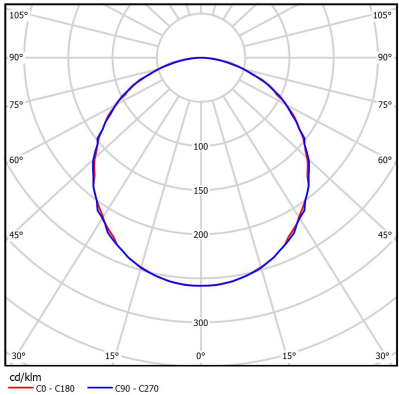

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 25-04-2024