



Description

Basic information

Family: LILY SQ N  
Product: LILY SQ N PLX DALI WH IP44 840 7 165  
Index: BLS0000007415  
Pictograms:




Lighting and electrical parameters


|                                            |                     |
|--------------------------------------------|---------------------|
| Light source                               | LED                 |
| <b>Luminous flux LED [lm]</b>              | <b>1242</b>         |
| LED power [W]                              | 8.6                 |
| <b>Luminaire luminous flux [lm]</b>        | <b>864</b>          |
| Power of luminaire [W]                     | 11                  |
| <b>Luminaire's light efficiency [lm/W]</b> | <b>79</b>           |
| Color of the light [K]                     | 4000                |
| <b>CRI</b>                                 | <b>&gt;80</b>       |
| SDCM (LED sources)                         | 2                   |
| <b>Beam angle [°]</b>                      | <b>50</b>           |
| Protection against electric shock          | I                   |
| <b>Protection degree</b>                   | <b>IP44</b>         |
| Voltage                                    | 220-240 V, 50-60 Hz |
| <b>Lifetime of LED sources [h]</b>         | <b>100000</b>       |
| Lx/By                                      | L80/B10             |
| <b>Operating temperature range [°C]</b>    | <b>5 ÷ 30</b>       |
| Driver                                     | DALI Driver         |

Mechanical parameters:

|                        |                        |
|------------------------|------------------------|
| Assembly               | ceiling mounted        |
| <b>Material</b>        | <b>steel sheet</b>     |
| Color                  | white                  |
| <b>Diffuser</b>        | <b>PLX opalized</b>    |
| Impact resistant       | IK04                   |
| <b>Dimensions [mm]</b> | <b>165 x 165 x 132</b> |



A graph of light

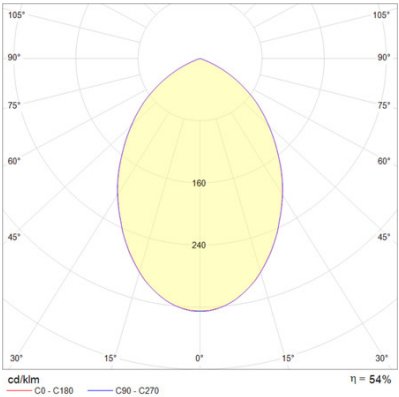

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 25-04-2024