



Description

Indoor LED floodlight with professional LEDs and various lens optical systems, making the luminaire suitable for sport halls, warehouses, production areas

Basic information

Family: PUMPKIN PRO  
Product: PUMPKIN PRO XL SH ANT FL IP66 740 319 408x481  
Index: BLS0000013392  
Pictograms:




Lighting and electrical parameters


|                                     |                     |
|-------------------------------------|---------------------|
| Light source                        | LED                 |
| Luminaire luminous flux [lm]        | 31996               |
| Power of luminaire [W]              | 229                 |
| Luminaire's light efficiency [lm/W] | 140                 |
| Color of the light [K]              | 4000                |
| CRI                                 | >70                 |
| Protection against electric shock   | I                   |
| Protection degree                   | IP66                |
| Voltage                             | 220-240 V, 50-60 Hz |
| Lifetime of LED sources [h]         | 102000              |
| Lx/By                               | L90/B10             |
| Operating temperature range [°C]    | - 50 ÷ +45          |
| Driver                              | LED driver          |

Mechanical parameters:

|                  |                   |
|------------------|-------------------|
| Assembly         | wall-mounted      |
| Material         | aluminum          |
| Color            | anthracite        |
| Diffuser         | SH tempered glass |
| Impact resistant | IK09              |
| Weight [kg]      | 4.7               |
| Dimensions [mm]  | 408 x 481 x 60    |

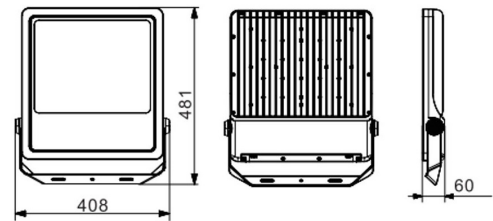

A graph of light

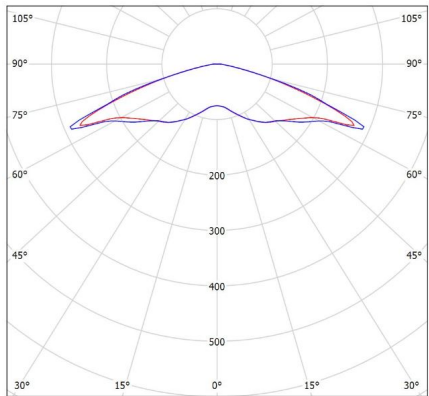

Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-09-2025

# Accessories

|       |                               |
|-------|-------------------------------|
| Index | BLS0000015166                 |
| Name  | Złączka IP68 - THB.391.A3A 3P |



|       |                               |
|-------|-------------------------------|
| Index | BLS0000015166                 |
| Name  | Złączka IP68 - THB.391.A3A 3P |

