



Description

The body of IRIS is made out of aluminium which is powder-lacquered with the use of weather condition resistant paint. The luminaire is equipped with special holder to mount the product on poles and booms. The luminaire's decline can be regulated to 15°. Its ingress protection is IP66. IRIS' diffuser is a transparent hardened glass. Photometry is received thanks to use of professional lens system.

Basic information

Family: **IRIS 421**
Product: **IRIS FL IP66 ANT 740 62 421 D48**
Index: **BLS0000014123**
Pictograms:




Lighting and electrical parameters


Light source	LED
Luminaire luminous flux [lm]	6291
Power of luminaire [W]	40.8
Luminaire's light efficiency [lm/W]	154
Color of the light [K]	4000
CRI	>70
SDCM (LED sources)	3
Protection against electric shock	I
Protection degree	IP66
Voltage	220-240V, 50-60Hz
Lifetime of LED sources [h]	102000
Lx/By	L90/B10
Operating temperature range [°C]	-40 ÷ 50
Driver	LED driver
Circuit load capacity	B10 - 16 B13 - 20 B16 - 24

Mechanical parameters:

Assembly	mounted on poles with brackets
Material	aluminum
Color	anthracite
Diffuser	transparent glass lenses
Impact resistant	IK09
Weight [kg]	2.83
Dimensions [mm]	421 x 214 x 88

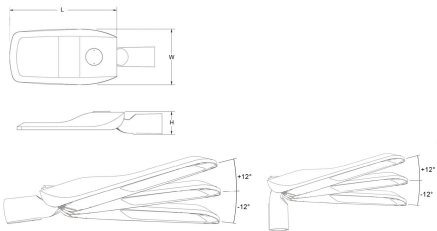

A graph of light

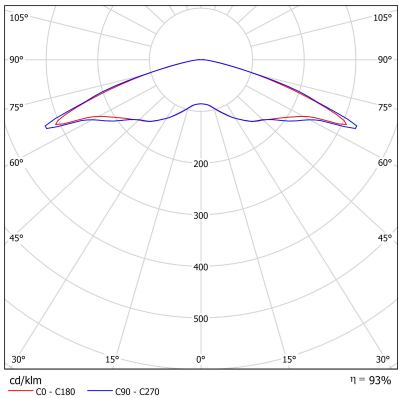

Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-08-2025